


# FIorentina 150

INDUZIONE - PORTA FORNO CHIUSA  
INDUCTION - SOLID OVEN DOOR



# 2OGS304IC

DISEGNI TECNICI  
TECHNICAL DRAWINGS

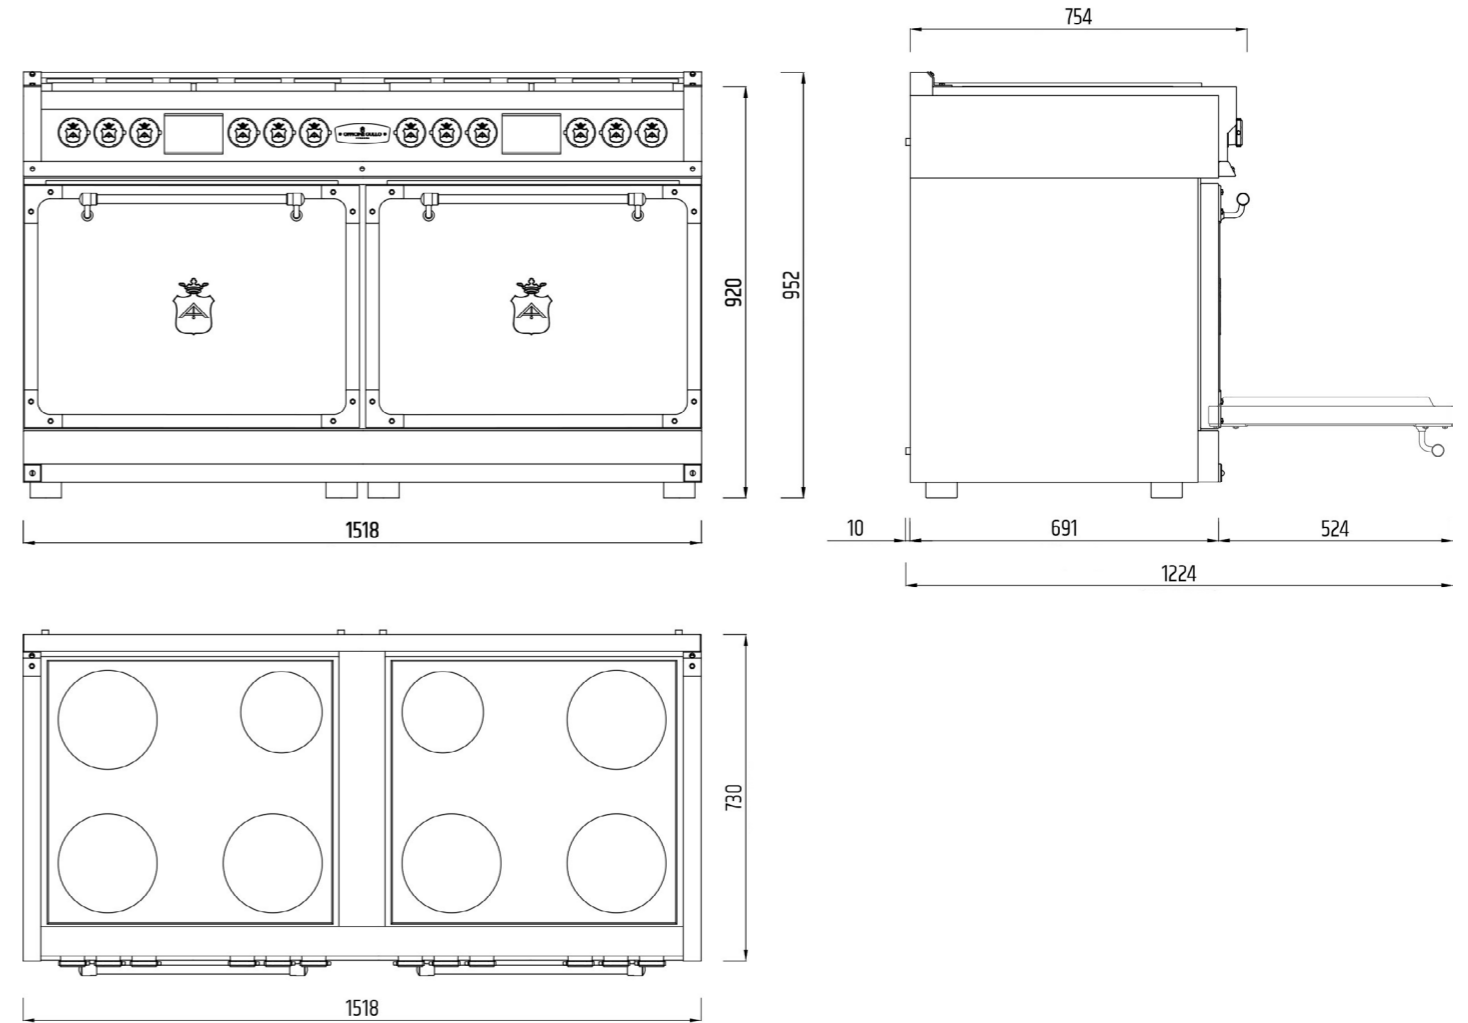

| CONTROL PANEL                       |                              |
|-------------------------------------|------------------------------|
| Control Type                        | 6 Heavy Duty Knobs           |
| Oven Programming                    | Electronic with 6 touch keys |
| Display: clock/temperature/function | White led                    |
| COOKTOP                             |                              |
| Type                                | Induction                    |
| Cooking Surface                     | Ceramic Glass                |

\* La scheda tecnica si riferisce alla Fiorentina 76 cm. La Fiorentina 152 cm è composta due Fiorentina 76 cm  
\* Technical specs refers to Fiorentina 76 cm. Fiorentina 152 cm is made by two Fiorentina 76 cm

| INDUCTION COOKTOP FEATURES                         |                                   |  |  |
|--|-----------------------------------|--|--|
| Cutting-edge technology for high level performance | 4 induction cooking zones         | Booster for each cooking zone                      |  |
| Reheat and low temperature functions               | Surface in glass ceramic          | ON/OFF indicators and residual heat (H) indicators |  |
| Burners types (Front-L)<br>-Power (max/booster)    | Inductor 230 mm - 2300 W / 3700 W |  |  |
| Burners types (Rear-L)<br>-Power (max/booster)     | Inductor 165 mm - 1400 W / 2200 W |  |  |
| Burners types (Front-R)<br>-Power (max/booster)    | Inductor 200 mm - 1850 W / 3000 W |  |  |
| Burners types (Rear-R)<br>-Power (max/booster)     | Inductor 200 mm - 1850 W / 3000 W |  |  |
| INDUCTION COOKTOP FUNCTIONS                        |                                   |  |  |
| Residual heat                                      | Melting                           | Warming  |  |
| Cookware recognition                               | Automatic Heat Up time            | Booster  |  |
| Control lock                                       |                                   |  |  |

| OVEN                                |   |  |
|-------------------------------------|---|--|
| Type                                | Electric self-clean - dual convection (true euro conv.) |  |
| Temperature regulation              | Electronic control (min/max 170/550°F - 75/290°C)       |  |
| OVEN FEATURES                       |   |  |
| Dual True convection                | 6 Digit touch control: digital timer and knobs          | Cool touch (< 50°C) with soft closing door |
| Black porcelain enamel interior     | 2 chromed racks   | 1 enamel tray with anti-splash insert      |
| 1 Fully retractable telescopic rack | PYROLYSIS Self-cleaning                                 | Internal lighting with 3 light sources     |
| OVEN FUNCTIONS                      |   |  |
| Proof                               | Bake  | Convection bake                            |
| Defrost                             | Dehydrate   | Broil                                      |
| Convection Roast                    | Convection broil  | Pizza                                      |
| OVEN DOOR(S)                        |   |  |
| Door hinges - soft-closing system   | Heavy duty steady tilt                                  |  |
| Handle style                        | Brass tube, brass endcaps                               |  |

| OVEN CAVITY                             |                   |
|---|-------------------|
| Capacity                                | 124 lt            |
| Cavity enamel colour                    | black             |
| Rack positions                          | 6                 |
| Oven lights                             | 3x20W halogen     |
| HEATING ELEMENTS (@230V)                |                   |
| Broil upper heating element             | 3500 W            |
| Upper auxiliary element                 | 1032 W            |
| Concealed bake lower heating element    | 3000 W            |
| Convection element                      | 2 x 1300 W        |
| DIMENSIONS/WEIGHT                       |                   |
| Overall dim - width                     | 760 mm            |
| Overall dim - height (min-max)          | 920 mm - 952 mm   |
| Overall dim - depth                     | 764 mm            |
| Gross weight                            | 141 kg            |
| POWER/RATINGS (230V, 50HZ)              |                   |
|   | 3.84 Kw / 3.54 Kw |
| Power cable                             | Schuko            |
| INSTRUCTIONS FOR USE                    |                   |
| Use & Care manual / Installation manual | italian/english   |


# FIorentina 150

INDUZIONE - PORTA FORNO VETRO  
INDUCTION - GLASS OVEN DOOR



# 20GG304IC

DISEGNI TECNICI  
TECHNICAL DRAWINGS

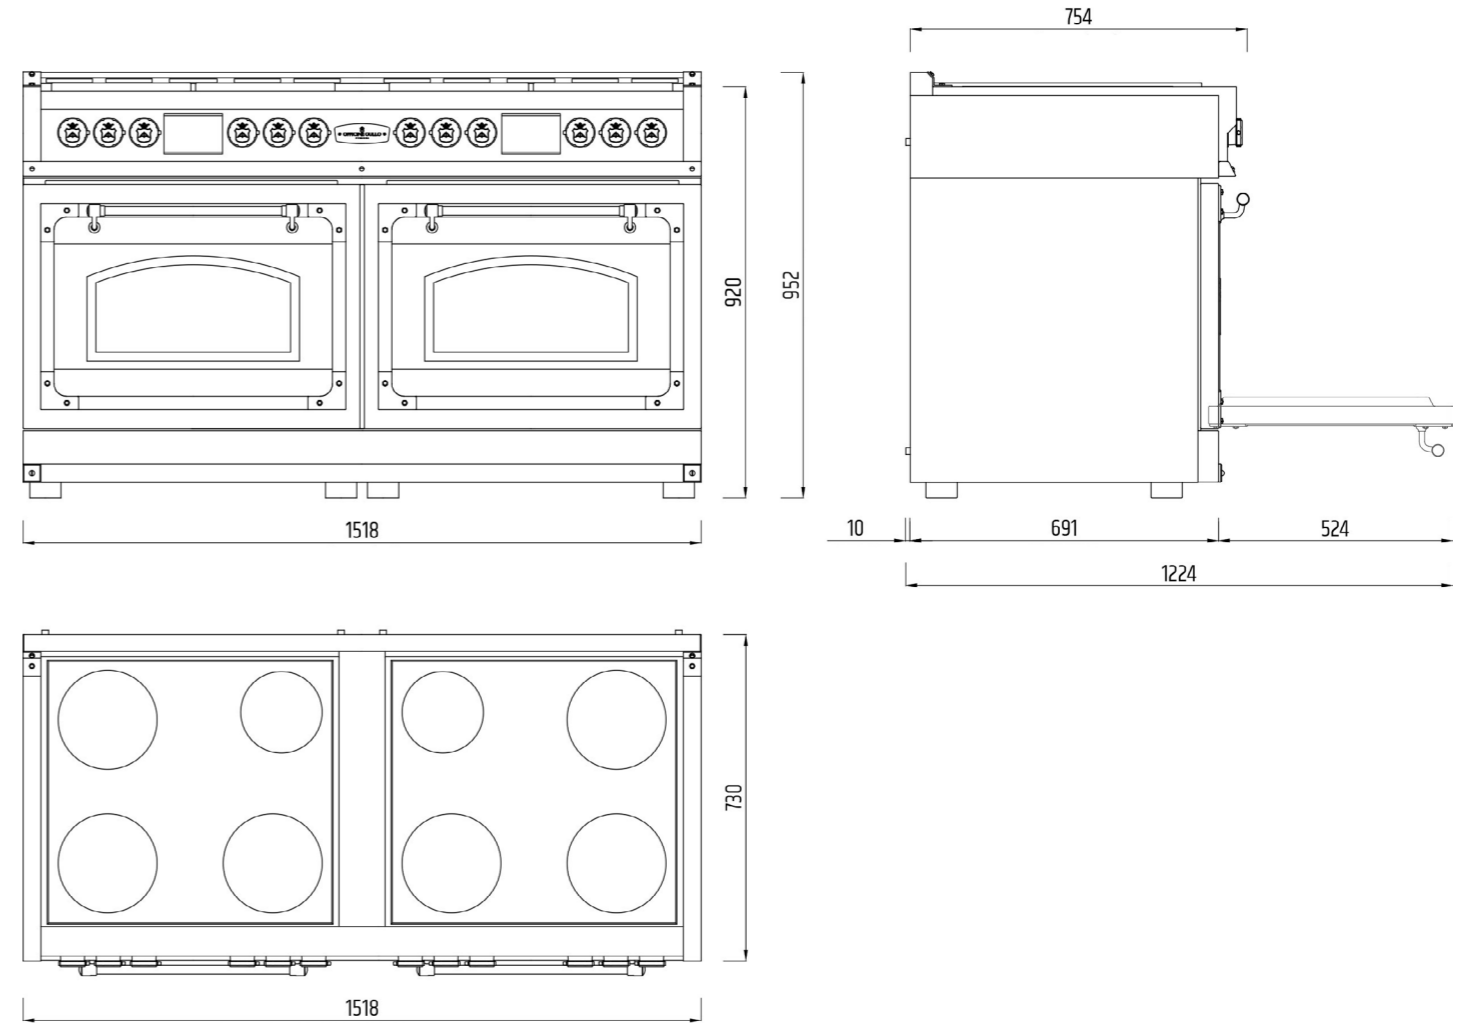

| CONTROL PANEL                       |                              |
|-------------------------------------|------------------------------|
| Control Type                        | 6 Heavy Duty Knobs           |
| Oven Programming                    | Electronic with 6 touch keys |
| Display: clock/temperature/function | White led                    |
| COOKTOP                             |                              |
| Type                                | Induction                    |
| Cooking Surface                     | Ceramic Glass                |

\* La scheda tecnica si riferisce alla Fiorentina 76 cm. La Fiorentina 152 cm è composta due Fiorentina 76 cm  
\* Technical specs refers to Fiorentina 76 cm. Fiorentina 152 cm is made by two Fiorentina 76 cm

| INDUCTION COOKTOP FEATURES                         |                                   |  |  |
|--|-----------------------------------|--|--|
| Cutting-edge technology for high level performance | 4 induction cooking zones         | Booster for each cooking zone                      |  |
| Reheat and low temperature functions               | Surface in glass ceramic          | ON/OFF indicators and residual heat (H) indicators |  |
| Burners types (Front-L) -Power (max/booster)       | Inductor 230 mm - 2300 W / 3700 W |  |  |
| Burners types (Rear-L) -Power (max/booster)        | Inductor 165 mm - 1400 W / 2200 W |  |  |
| Burners types (Front-R) -Power (max/booster)       | Inductor 200 mm - 1850 W / 3000 W |  |  |
| Burners types (Rear-R) -Power (max/booster)        | Inductor 200 mm - 1850 W / 3000 W |  |  |
| INDUCTION COOKTOP FUNCTIONS                        |                                   |  |  |
| Residual heat                                      | Melting                           | Warming  |  |
| Cookware recognition                               | Automatic Heat Up time            | Booster  |  |
| Control lock                                       |                                   |  |  |

| OVEN                                |   |  |
|-------------------------------------|---|--|
| Type                                | Electric self-clean - dual convection (true euro conv.) |  |
| Temperature regulation              | Electronic control (min/max 170/550°F - 75/290°C)       |  |
| OVEN FEATURES                       |   |  |
| Dual True convection                | 6 Digit touch control: digital timer and knobs          | Cool touch (< 50°C) with soft closing door |
| Black porcelain enamel interior     | 2 chromed racks   | 1 enamel tray with anti-splash insert      |
| 1 Fully retractable telescopic rack | PYROLYSIS Self-cleaning                                 | Internal lighting with 3 light sources     |
| OVEN FUNCTIONS                      |   |  |
| Proof                               | Bake  | Convection bake                            |
| Defrost                             | Dehydrate   | Broil                                      |
| Convection Roast                    | Convection broil  | Pizza                                      |
| OVEN DOOR(S)                        |   |  |
| Oven glass window                   | Deep embossed extra wide window                         |  |
| Door cooling system                 | 4 heat resistant glasses                                |  |
| Door hinges - soft-closing system   | Heavy duty steady tilt                                  |  |
| Handle style                        | Brass tube, brass endcaps                               |  |

| OVEN CAVITY                             |                   |
|---|-------------------|
| Capacity                                | 124 lt            |
| Cavity enamel colour                    | black             |
| Rack positions                          | 6                 |
| Oven lights                             | 3x20W halogen     |
| HEATING ELEMENTS (@230V)                |                   |
| Broil upper heating element             | 3500 W            |
| Upper auxiliary element                 | 1032 W            |
| Concealed bake lower heating element    | 3000 W            |
| Convection element                      | 2 x 1300 W        |
| DIMENSIONS/WEIGHT                       |                   |
| Overall dim - width                     | 760 mm            |
| Overall dim - height (min-max)          | 920 mm - 952 mm   |
| Overall dim - depth                     | 764 mm            |
| Gross weight                            | 141 kg            |
| POWER/RATINGS (230V, 50HZ)              |                   |
|   | 3.84 Kw / 3.54 Kw |
| Power cable                             | Schuko            |
| INSTRUCTIONS FOR USE                    |                   |
| Use & Care manual / Installation manual | italian/english   |